

Premium 8 Plus with applied Nano Cell Technology

Removal of 95% of odor emitted by EVA material. (Odor is not harmful to human health)

- ◆ Astounding Sound Reduction
- ◆ Superior Moisture Protection
- ◆ Added Cushion of Flooring
- ◆ Shield for Mold & Mildew Protection
- ◆ Excellent thermal insulation properties
- ◆ Helps correct minor subfloor irregularities
- ◆ Easy to install, cuts with scissors
- ◆ Made from recycled materials and 100% recyclable

3 mm Closed Foam Technology designed for excellent sound reduction.



Extra fine, for advanced moisture protection and shock absorption.

Anti-crush technology for excellent performance and long life.

For use under LVT / LVP, Laminate, and Engineered Wood Flooring

It can be used in nail down, glue down and floating installations.

Close Up of Materials

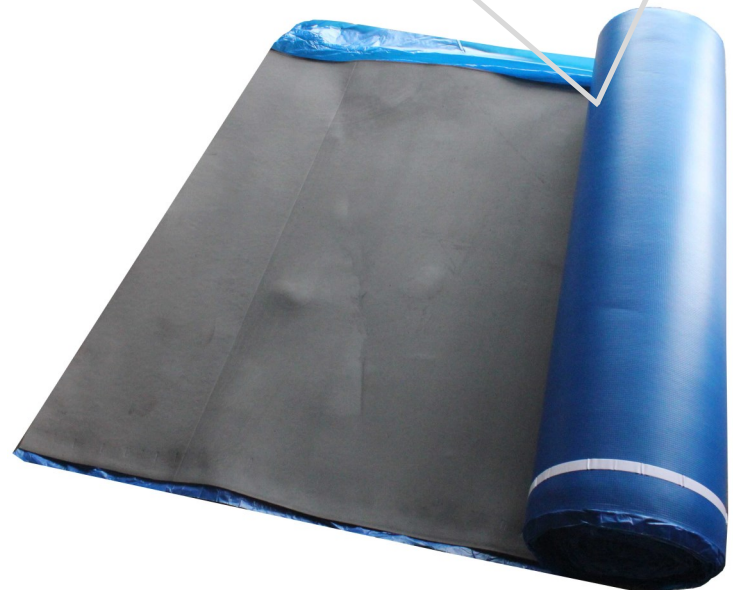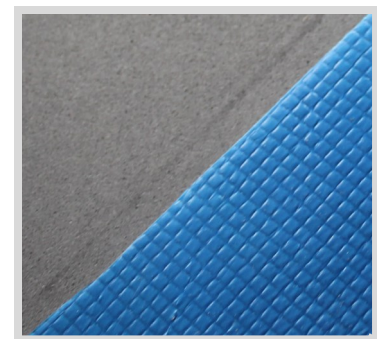

Sound Insulation Properties

STC	72
IIC	73
DELTA	21

Dimensions

Thickness	3mm
Width	1100mm
Length	17000mm
Square Footage/Roll	200 sq.ft.
Weight Per Roll	15.5 lbs.
Density	3.5 lbs. per cubic feet
Fire Resistance	UL 94 HFI F.A.R. 25. 83
Water Absorption	0.0015 lbs per cubic feet
Thermal Conductivity	0.32btu/hour/sq.in.

Impact Insulation Class (IIC): Transmission of impact noise can be controlled by isolation. The ratings are greatly improved by using cork underlayment. The higher the IIC number the better the impact insulation.

Sound Transmission Class (STC): Measure of resistance of a building element such as a floor or wall to the passage of audible sounds. The higher the STC number the better the sound barrier .